

Approval body for construction products
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and
Laender Governments



European Technical Assessment

ETA-16/0067
of 21 April 2016

English translation prepared by DIBt - Original version in German language

General Part

Technical Assessment Body issuing the
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Sheh Kai Concrete Screw SK 6

Product family
to which the construction product belongs

Concrete screw for multiple use for non-structural
applications

Manufacturer

SHEH KAI PRECISION CO., LTD
No. 1, Ben Gong 1st Rd., Ben Chou Industrial Park,
KAOHSIUNG 82059
TAIWAN R.O.C

Manufacturing plant

SHEH KAI PRECISION CO., LTD
No. 1, Ben Gong 1st Rd., Ben Chou Industrial Park,
KAOHSIUNG 82059
TAIWAN R.O.C

This European Technical Assessment
contains

10 pages including 3 annexes

This European Technical Assessment is
issued in accordance with Regulation (EU)
No 305/2011, on the basis of

Guideline for European technical approval of "Metal
anchors for use in concrete", ETAG 001 Part 6: "Anchors
for multiple use for non-structural applications",
April 2013,
used as European Assessment Document (EAD)
according to Article 66 Paragraph 3 of Regulation (EU)
No 305/2011.

European Technical Assessment

ETA-16/0067

English translation prepared by DIBt

Page 2 of 10 | 21 April 2016

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

Specific Part

1 Technical description of the product

The Sheh Kai concrete screw of sizes SK 6 is an anchor made of galvanized steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

| Wesentliches Merkmal | Leistung |
|--|---------------------|
| Characteristic resistance under static and quasi-static loading, displacements | See Annex C1 and C2 |

3.2 Safety in case of fire (BWR 2)

| Essential characteristic | Performance |
|--------------------------|---|
| Reaction to fire | Anchorage satisfies requirements for Class A1 |
| Resistance to fire | No performance determined |

3.3 Safety in use (BWR 4)

The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

In accordance with guideline for European technical approval ETAG 001-6, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [97/161/EC].

The system to be applied is: 2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 21 April 2016 by Deutsches Institut für Bautechnik


Uwe Bender
Head of Department

beglaubigt:
Lange

Concrete screw after installation

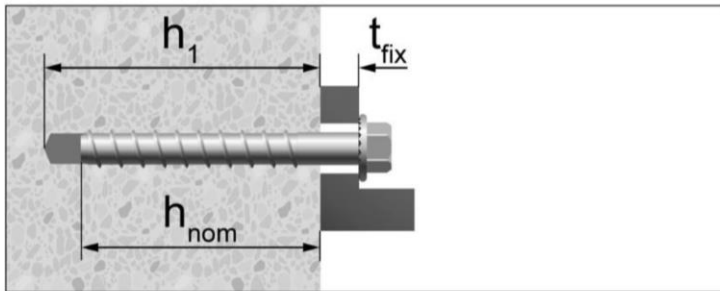

Marking of head




Head marking:

Identifying mark of producer: SK

Nominal size: 6 mm

Length L: e.g. 60mm

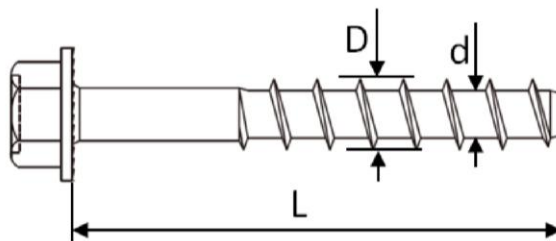

Reverse Locking
Serrations

Table A1: Dimension and materials

| Anchor size | | | SK 6 |
|------------------|-------|------|---|
| Length of anchor | min L | [mm] | 60 |
| | max L | [mm] | 140 |
| Thread diameter | D | [mm] | 7,5 |
| Shaft diameter | d | [mm] | 5,5 |
| Thread pitch | p | [mm] | 4,45 |
| Material | | | Steel 10B21 acc. to SAE-J403 Elongation $A_5 \leq 8\%$ |
| Coating | | | zink coating: elektro plated ($>5\mu\text{m}$) or mechanical plated ($>30\mu\text{m}$) |

Sheh Kai Concrete Screw SK

Product description

Installed condition, dimensions and materials

Annex A 1

Intended use

Anchorage subject to:

- Static and quasi-static loads.
- Used only for multiple use for non structural application according to ETAG 001, Teil 6.

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000,
- Strength classes C20/25 to C50/60 according to EN 206-1:2000,
- Non-cracked or cracked concrete: all sizes.

Use conditions (Environmental conditions)

- Anchorages subject to dry internal conditions.

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static or quasi-static actions are designed for design method A in accordance with:
 - Either ETAG 001, Annex C, Edition August 2010
 - Or CEN/TS 1992-4:2009

Installation:

- Hammer drilling only: all sizes and all embedment depths.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted hole is filled with high strength mortar and if under shear or oblique tension load it is not the direction of the load application.
- After installation further turning of the anchor must not be possible.
- The head of the anchor must be supported on the fixture and is not damaged.

Sheh Kai Concrete Screw SK

**Intended Use
Specifications**

Annex B 1

Table B1: Installation parameters

| Anchor size | | | SK 6 |
|-------------------------------------|----------------|------|------|
| Nominal diameter of drill bit | d_0 | [mm] | 6 |
| Nominal embedment depth | h_{nom} | [mm] | 55 |
| Min. hole depth in concrete | $h_1 \geq$ | [mm] | 64 |
| Effective anchorage depth | h_{ef} | [mm] | 42,6 |
| Clearance hole | d_f | [mm] | 9 |
| Thickness of fixture | t_{fix} | [mm] | 5-85 |
| Installation torque | T_{inst} | [Nm] | 20 |
| Wrench size | WS | [mm] | 10 |
| Max. torque moment, machine setting | $T_{max} \leq$ | [Nm] | 80 |

Table B2: Minimum thickness of member, Minimum spacing and edge distance


| Anchor size | | | SK 6 |
|--------------------------|-----------|------|------|
| Minimum member thickness | h_{min} | [mm] | 100 |
| Minimum edge distance | c_{min} | [mm] | 40 |
| Minimum spacing | s_{min} | [mm] | 40 |

Sheh Kai Concrete Screw SK


Intended Use
Installation parameters

Annex B 2


Installation instruction

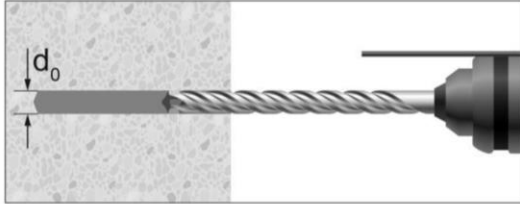

Drill the hole to the depth h_1 .

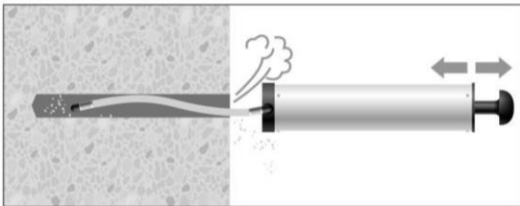


Clean the hole.

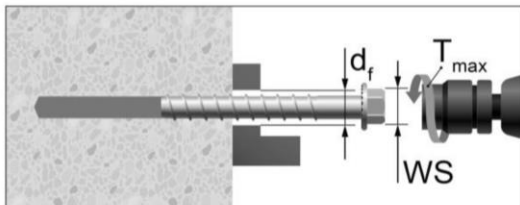

Screw in the anchor by using a torque wrench or an impact screw driver.

In case of using torque wrench: T_{inst} acc. to Table B1.

In case of using impact screw driver: T_{max} acc. to Table B1.
WS= Wrench Size

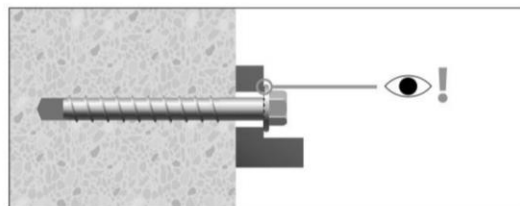

Control of complete setting, full contact of screw head with fixture part.

Sheh Kai Concrete Screw SK

Intended Use
Installation instruction

Annex B 3

Table C1: Characteristic resistances under tension loading, Design method A

| Anchor size | | | SK 6 |
|--|--|------|--------------------|
| Steel failure | | | |
| Characteristic resistance | $N_{Rk,s}$ | [kN] | 19,7 ⁴⁾ |
| Partial safety factor | γ_{Ms} [-] | [kN] | 1,4 |
| Pull-out failure | | | |
| Characteristic resistance in cracked and uncracked concrete C20/25 | $N_{Rk,p}$ | [kN] | 5,0 |
| Installation safety factor | $\gamma_{2^{(2)}} = \gamma_{Inst^{(1)}}$ | [-] | 1,0 |
| Concrete cone failure | | | |
| Effective anchorage depth | h_{ef} | [mm] | 42,6 |
| Characteristic edge distance | $c_{cr,N}$ | [mm] | 1,5 h_{ef} |
| Characteristic spacing | $s_{cr,N}$ | [mm] | 3 h_{ef} |
| Installation safety factor | $\gamma_{2^{(2)}} = \gamma_{Inst^{(1)}}$ | [-] | 1,0 |
| Factor for cracked concrete | $k_{cr^{(1)}}$ | [-] | 7,2 |
| Factor for uncracked concrete | $k_{ucr^{(1)}}$ | [-] | 10,1 |
| Splitting failure³⁾ | | | |
| Characteristic edge distance for splitting | $c_{cr,sp}$ | [mm] | 1,5 h_{ef} |
| Characteristic anchor spacing for splitting | $s_{cr,sp}$ | [mm] | 3 h_{ef} |
| Installation safety factor | $\gamma_{2^{(2)}} = \gamma_{Inst^{(1)}}$ | [-] | 1,0 |
| Factor for cracked concrete | $k_{cr^{(1)}}$ | [-] | 7,2 |
| Factor for uncracked concrete | $k_{ucr^{(1)}}$ | [-] | 10,1 |

1) Parameters relevant only for design according to CEN/TS 1992-4:2009

2) Parameter relevant only for design according to ETAG001 Annex C

3) The value $N_{Rk,p}$ has to be inserted as $N_{Rk,c}^0$ in Equation (5.3) of ETAG 001, Annex C or as N_{Rk}^0 in Equation (12) of CEN/TS 1992-4-4:2009 resp.

4) The design value $N_{Rd,s}$ has to be limited according to ETAG001, part 6, Annex 1.

Sheh Kai Concrete Screw SK

Design method A,
Characteristic values under tension loading

Annex C 1

Table C2: Characteristic resistance under shear loading, Design method A

| Anchor size | | | SK 6 |
|---|---------------------|------|------|
| Setting depth | h_{nom} | [mm] | 55 |
| Effective embedment depth | h_{ef} | [mm] | 42,6 |
| Steel failure without lever arm | | | |
| Characteristic resistance | $V_{Rk,s}$ | [kN] | 7,3 |
| Factor for groups | $k_2^{1)}$ | [-] | 0,8 |
| Partial safety factor | γ_{Ms} | [-] | 1,4 |
| Steel failure with lever arm | | | |
| Characteristic resistance | $M^0_{Rk,s}$ | [Nm] | 15,9 |
| Partial safety factor | γ_{Ms} | [-] | 1,4 |
| Concrete pryout failure | | | |
| k-factor | $k^{2)} = k_3^{1)}$ | [-] | 1,0 |
| Partial safety factor | γ_{Mcp} | [-] | 1,5 |
| Concrete edge failure | | | |
| Effective length of anchor in shear loading | ℓ_t | [mm] | 42,6 |
| Effective diameter of anchor | d_{nom} | [mm] | 5,37 |
| Partial safety factor | γ_{Mc} | [-] | 1,5 |

1) Parameters relevant only for design according to CEN/TS 1992-4:2009

2) Parameter relevant only for design according to ETAG001 Annex C

Sheh Kai Concrete Screw SK

Design method A,
Characteristic values under shear loading

Annex C 2